PRODUCT SPEC SHEET



AGSGSV3 NPT Gas Solenoid Valves



Product Overview:

Key Features:

- 120/110VAC
- Normally Closed Safety Shutoff
- 3" NPT
- Zero Differential
- 0-7PSI Maximum Working Pressure
- 1/8" Inlet & Outlet Ports
- · Visual Power Indication
- Die Cast Alumium Body
- Min Temp: 5°F / Max Temp: 140°F

The AGS-GSV3 is a normally closed, electrically operated gas valves providing safety shut down over combustible gas such as natural (Methane) and LP (Liquefied petroleum). This gas solenoid valve is compatible with screwed piping.

Suitable for CSD-1 applications along with on/off control on water heaters, atmospheric boilers, roof top make up air units, power burners and commercial kitchen ranges.


Add manual re-set by incorporating an AGS controller or panic button.

Approvals:

Automatic shut off valves comply with:

- UL YIOZ7 Automatic Shut Off Valves
- AGA
- CSA/ANSI Z21.21-CGA6.5 FM
- CSD-1 Acceptable

Mounting Position:



Metal shoe construction of the diaphragm allows for vertical installation, with less damage from debris and over pressure.



WARNING

If the flow is not in the same direction of arrow, valve may not shut off.

Power LED Indicator:



Blue LED indicates valve is receiving control voltage and should be in the open position.

PRODUCT SPEC SHEET



AGSGSV3 Technical Information

Technical Specification:

Size K

Kv Flow Factor 89.6

Flow Capacity 160m3/hr **Btu/hr** 5,661,700

Outdoor Installation:

The GSV3 is weatherproof if installed with the coil in a vertical position.

Technical Information:

Opening Time: <1 second
Closing Time: <1 second
Maximum Working Possure: 7PSI (195 in x

Maximum Working Pessure: 7PSI (195 in w.c.)
Protection Level: IP54 (nema 3S)

Ambient/ Fluid Temperature: 5 to 140°F
Coil Temperature: 139°F
Body Connections: NPT

Seal Material: NBR rubber Body Material: Aluminum


Spring Material: AISI 302 stainless steel Voltage: 110/120V AC & 24V DC

Rating: 50/60 Hz
Coil Level F: 360° Rotation
Suitable For: Permanent

Power Consumption:

Size	110/120VAC	24VDC	
3"	18W	65W	

Dimensions:

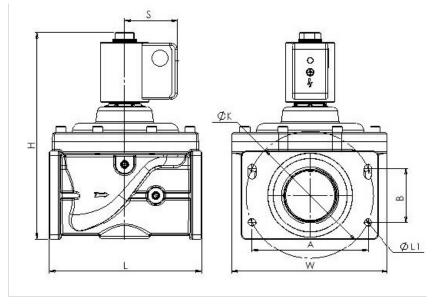

Size	L	н	W	
3" NPT	7.8"	10.57"	7.95"	
S	K	LI	A	В
2 67"	7.8"	0.41"	7 95"	2.67

Find out more

American Gas Safety LLC

www.americangassafety.com

Head office:

 $6304\ Benjamin\ Road,\ Suite\ 502,\ Tampa,\ FL\ 33634$

Tel: (727) 608-4375

Email: info@americangassafety.com

